



IMV VIBRATION
TEST SYSTEMS

A series

Air-cooled Vibration Test Systems

A45/SA4HAG A45/EM4HAG



A-series is the “new standard” in vibration testing, with a solid test performance. A-series increases the relative excitation force and has a displacement of 76.2 mmp-p (3 inch stroke) *1 which gives good balance between specification of velocity, acceleration and displacement. It also provides a maximum of 3.5 m/s shock velocity testing, which responds to the demand in lithium battery testing. Rapid creation of a test from a set of pre-defined templates conforming to most international test standards. Simply select the standard required to generate the main test settings.

*1) Only for A30, A45, A65, A74

1. Improvement of performance

Expansion of test cases and responses to high spec. tests allow the A-series to meet a wide range of testing needs.

- Improvement in excitation force
- Standard 76.2 mmp-p displacement
- Expansion in frequency range
- High velocity shock test


2. User friendly and secure

Greater security and functionality with improved energy savings.

3. User first principle

Intuitive interface guides the operator for easy use.

Comparison of consumed power per excitation force

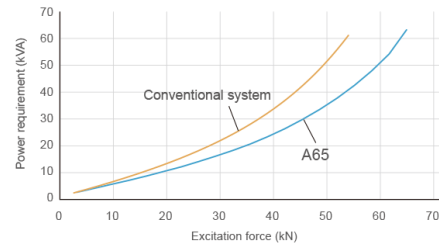



**IMV VIBRATION
TEST SYSTEMS**
A series

Air-cooled Vibration Test Systems

A45/SA4HAG A45/EM4HAG



System Specification			
System Model		A45/ SA4HAG	A45/ EM4HAG
Frequency Range (Hz)		0-2,600	0-2,600
Rated Force	Sine (kN)	45	45
	Random (kN rms) ^{*1}	45	45
	Shock (kN)	90	90
	High Velocity Shock (kN) ^{*4}	-	80
Maximum Acc.	Sine (m/s ²)	900	900
	Random (m/s ² rms)	630	630
	Shock (m/s ²)	1,800	1,800
	High Velocity Shock (m/s ² peak) ^{*4}	-	1,600
Maximum Vel.	Sine (m/s)	2.0	2.0
	Shock (m/s peak)	2.5	2.5
	High Velocity Shock (m/s peak) ^{*4}	-	3.5
Maximum Disp.	Sine (mmp-p)	76.2	76.2
	High Velocity Shock (mmp-p)	-	76.2
Maximum Travel (mmp-p)		82	82
Maximum Load (kg)		600	600
Power Requirements (kVA) ^{*2}		57	57
Breaker Capacity (A) ^{*3}		100	100

Vibration Generator (A45)	
Armature Mass (kg)	50
Armature Diameter (φ mm)	436
Armature Resonance (Hz)	2,080
Allowance Eccentric Moment (N·in)	1,550
Mass (kg)	3,200

Power Amplifier	SA4HAG-A45	EM4HAG-A45
Maximum Output (kVA)	44	
Mass (kg)	900	1,000

Cooling (VAPE710/P2R)		
Mass (kg)	218	
Cooling Air Flow (m ³ /min)	48	
Environmental Data		
Input Voltage Supply (3 φ, V)	380/400/415/440	
Compressed Air Supply (Mpa)	0.7	
Working Ambient Temperature	Shaker (°C)	0-40
	Amplifier (°C)	0-40

^{*1} Random force ratings are specified in accordance with ISO5344 conditions. Please contact IMV or your local distributor with specific test requirements.
^{*2} Power supply: 3-phase 380/400/415/440 V, 50/60 Hz. A transformer is required for other supply voltages.
^{*3} Breaker capacity for 480 V.
^{*4} Maximum velocity 4.6 m/s. High velocity restricts maximum Shock force.
 Continuous use at maximum levels may cause failure. Please contact IMV if your system operates at more than 70%.
^{*}For random vibration tests, please set the test definition of the peak value of acceleration waveform to operate at less than the maximum acceleration of shock.
^{*}Frequency range values vary according to the sensor and vibration controller.
^{*}Armature mass and acceleration may change when a chamber is added.

Vibration Generator (A30) **a: W 1,232 mm**
b: H 1,215 mm
c: D 1,040 mm



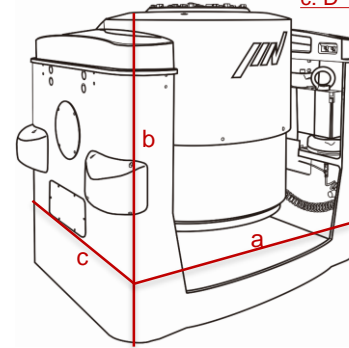


Table Insert Pattern (unit: mm)

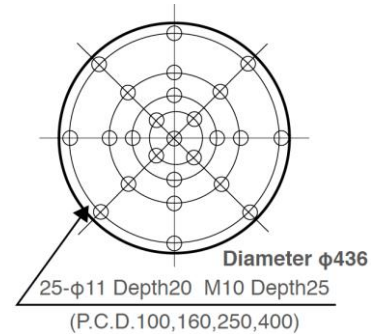

Amplifier

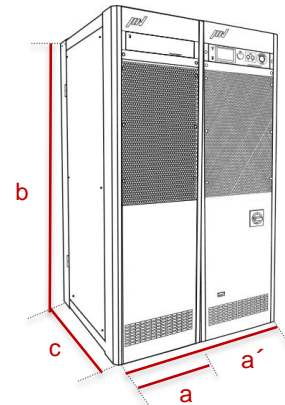


SA4HAG-A45

a: W 580 mm
b: H 1,950 mm
c: D 850 mm

EM4HAG-A45

a': W 1,160 mm
b: H 1,950 mm
c: D 850 mm

Blower

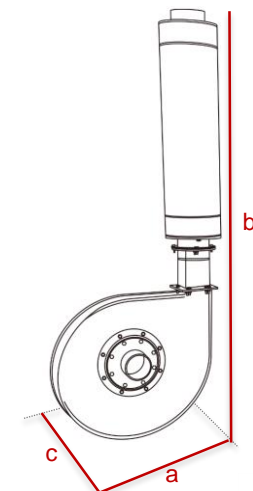

a: W 1,160 mm
b: H 2,405 mm
c: D 787 mm